

ELECTRONIC DIRECT WIRE-IN PHOTOCONTROLS

“The Performance of an Electronic Twist-lock in a Button Control”

DESCRIPTION

B Series electronic “button type” photocontrols have the same features and performance of electronic twist-lock photocontrols. Energy efficiency is maintained with tight On/Off ratios and “non-drift operation”. Maintenance costs are reduced through a cool running DC circuit. Life expectancy is up to three times longer than traditional heat generating thermal relay designs. The **B Series** uses the same field proven electronic circuit design as is used in Sun-Tech high performance twist-lock photocontrols.


FEATURES

- Meets or exceeds ANSI C136.10.
- Proven DC circuit design.
- Close 1:1.5 on to off operating ratio.
- Non-chatter load break.
- Surge Protected Electronic Circuit.
- Heavy duty construction.

BENEFITS

- 12 year expected life.
- Low power consumption and extended life from “cool” operating DC circuit.
- Close ratio reduces burning hours at sunrise.
- Extended life and accuracy from non-drift operation throughout its life.
- Significantly reduced energy costs.
- Significantly reduced maintenance costs.

MECHANICAL SPECIFICATIONS



Housing:
Window:
Lead Wires:
Packaging:
Weight:
Size:

UV stabilized, impact resistant thermal plastic.
UV inhibitive and absorbing acrylic..
#18 AWG, 12” long.
Individual units are sealed in water resistant plastic.
3.0 oz. each, 20 lbs. per 100 unit carton.
16” x 16” x 12” per 100 unit carton.

Warranty: 6 Year 1 for 1 replacement warranty.

B-Series

ELECTRONIC DIRECT WIRE-IN PHOTOCONTROLS

OPERATING SPECIFICATIONS

Operating Voltage:

Model	Voltage
B120	105 - 130
B124	105 - 305
B240	195 - 305

Load Rating:

1000 Watt tungsten, 1800 VA

Life at rated load:

5,000 Operations (13.7 Years)

Power Consumption:

1.0 watts average @ 120 volts

1.6 watts average @ 208 volts

1.9 watts average @ 240 volts

2.1 watts average @ 277 volts

Moisture Resistance:

100% RH.

Standard Surge Protections:

- 90 Joule.
- 160 Joule.

Operating Light Levels:

+/- 0.1 fc. from specified turn-on level.

1:1.5 Average turn-on to turn-off ratio.

Photosensor:

- Conformally coated cadmium sulfide photocell.
- Encapsulated phototransistor.

Dielectric Strength:

5,000 Volts between any current carrying part.


Ambient Temperature Range:

-40°C to +70°C (-40°F to + 158°F)

CROSS REFERENCE

Sun - Tech	Dark to Light
B120	D120
B240	D240
B124	

ORDERING INFORMATION

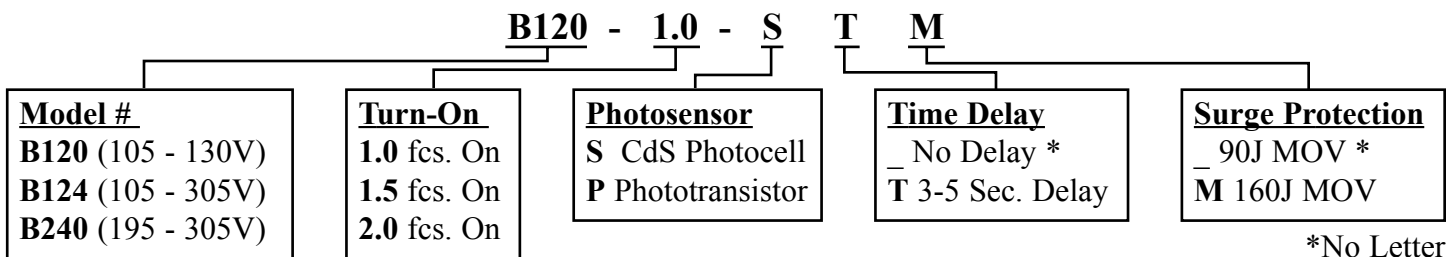

Sunrise Technologies • 54 Commercial St. • Raynham, MA 02767

Phone: (508) 821-1597 • Fax: (508) 822-0593 • E-mail: info@sun-tech.biz • www.sun-tech.biz